

Screen 2

Two-way bi-amp system

cinema

features

- ▶ Two-way bi-amp design
- ▶ THX™ approved
- ▶ Very shallow profile
- ▶ High SPL
- ▶ Low distortion


applications

- ▶ Behind screen placement
- ▶ Preview theatres
- ▶ For rooms up to 150 seats

The Screen 2 Cinema system has been developed to accommodate the various digital formats of modern films, providing the essentials of low distortion, wide bandwidth, with uniform coverage for the smaller room. This makes the Screen 2 ideally suited for small cinemas, preview theatres, screening rooms and post production suites.



overall dimensions

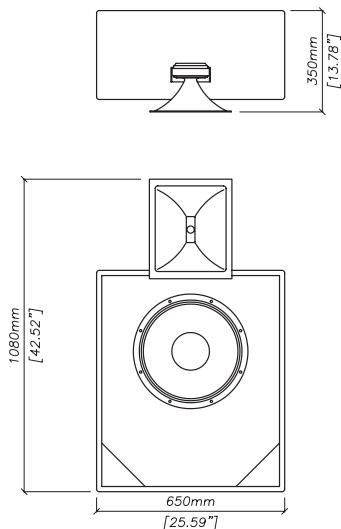

technical specifications

TYPE	Two-way bi-amp screen system
DRIVERS	1 x 15" (380mm) low frequency 1 x 1" (25mm) exit HF compression driver
FREQUENCY RESPONSE (1)	45Hz-20kHz ±3dB
RATED POWER (2)	LF: 550W AES, 2200W peak HF: 60W AES, 240W peak
SENSITIVITY (3)	LF: 98dB HF: 110dB
CROSSOVER	1.2kHz
IMPEDANCE	LF: 8 ohms HF: 8 ohms
DISPERSION (-6dB)	90° horizontal, 90° vertical
DIMENSIONS	LF: (W) 650mm x (H) 765mm x (D) 307mm (W) 26ins x (H) 30ins x (D) 12ins HF: (W) 285mm x (H) 344mm x (D) 185mm (W) 11.2ins x (H) 13.5ins x (D) 7.3ins
INSTALLED DIMENSIONS	(W) 650mm x (H) 1080mm x (D) 350mm (W) 26ins x (H) 42.5ins x (D) 13.8ins
WEIGHT	LF: 39kg (86lbs) HF: 4.5kg (9.9lbs)



approved by Lucasfilm for use in THX™ theatres.

Century Point, Halifax Road, Cressex Business Park,
High Wycombe, Buckinghamshire HP12 3SL, England.
Telephone: +44 (0)1494 535312 Facsimile: +44 (0)1494 438669
E-mail: info@martin-audio.com
All information is Copyright © 2003 Martin Audio Ltd.



www.martin-audio.com